



We present the MSZ-AY wall mounted air conditioners from the "Plus" line, to be enjoyed and shared every day. Because the environments you love, where you live or work, deserve the best air. We at Mitsubishi Electric know this well.



MSZ-AY


wall unit


- New satin finish for an elegant and compact design
- Uses the new R32 low environmental impact refrigerant fluid
- Improved air quality thanks to the Plasma Quad Plus filter
- Backlit remote-control display
- Low sound level: only 18 dB(A)
- Compatible with MXZ-F multi-split systems
- Self Clean Mode prevents mould and bad smells
- Integrated Wi-Fi control
- Dual Barrier Coating technology
- Weekly timer







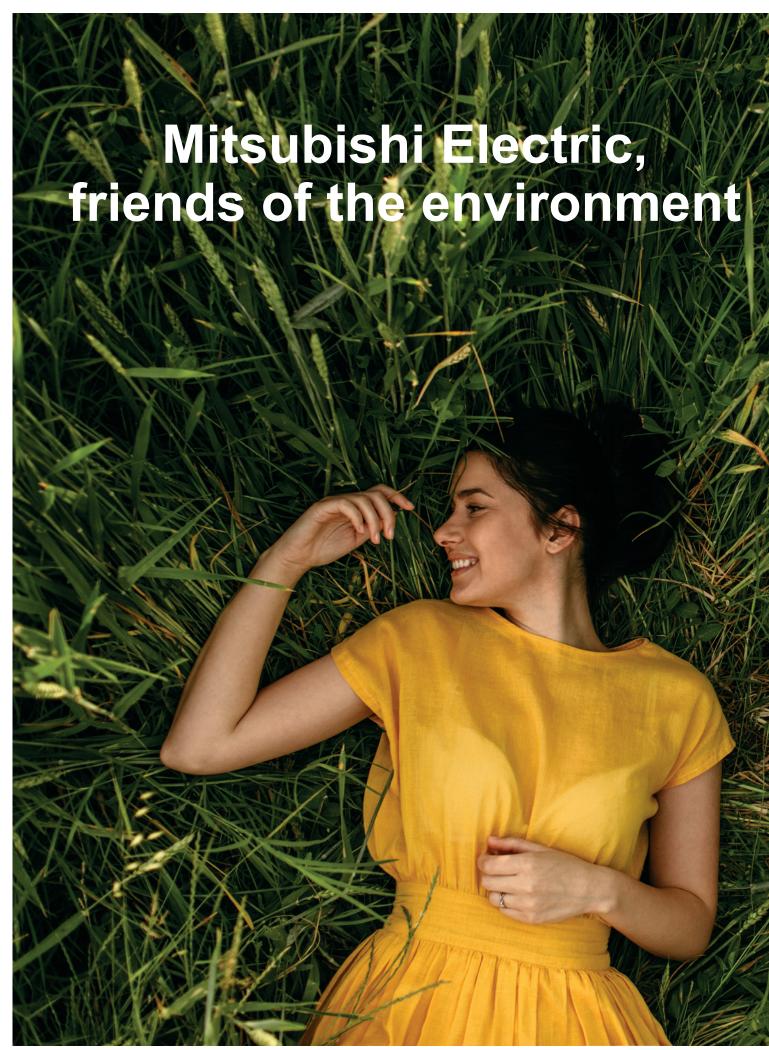

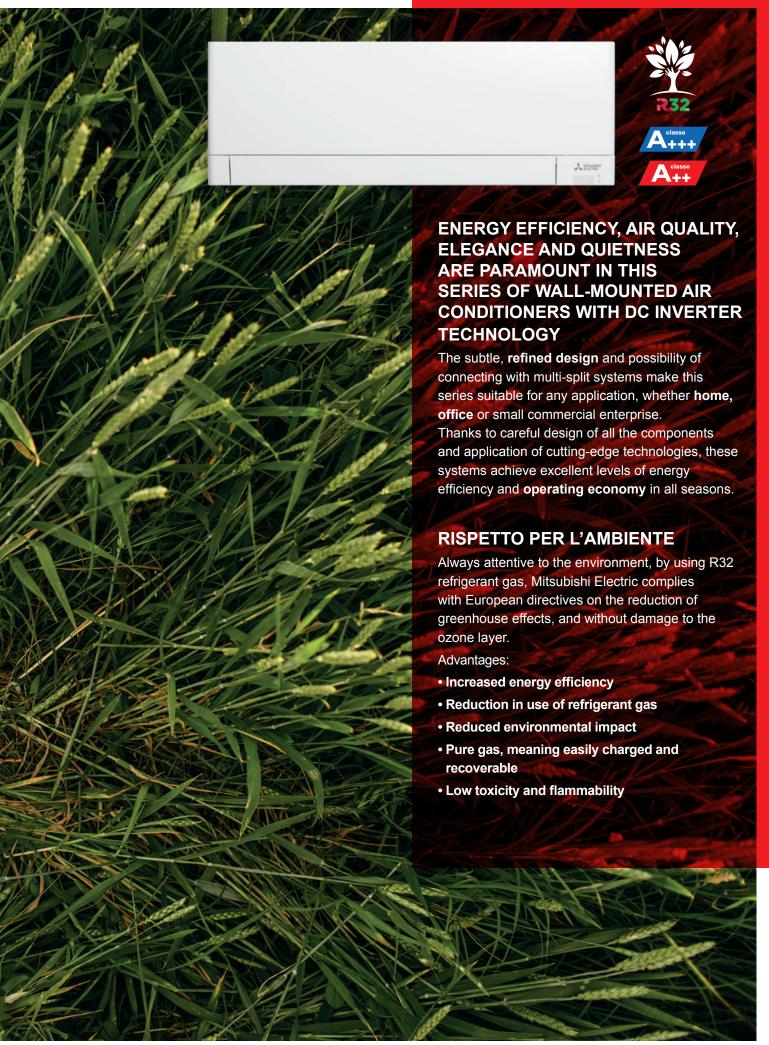



Exceptionally silent and comfortable

Greater silence for greater comfort

Our environmental comfort depends in part on sound levels, and this is especially important in bedrooms and studies. The MSZ-AY line **guarantees an ideal climate all year round**, with a sound level almost imperceptible to the human ear. The 18 dB(A) achieved by the MSZ-AY model is quieter than the sound of leaves rustling in the wind, making the air conditioner effectively inaudible to the room occupants.

This is why MSZ-AY is particularly suitable for domestic environments such as bedrooms and living areas, where we carry out our daily activities and spend most of our time.





MSZ-AY 25-35-42-50





The ideal solution for every space

AIR CONDITIONER
SIZES 25-35-42
CAN BE COUPLED WITH
OUTDOOR UNIT
MUZ-AY25/35/42VG
SUITABLE FOR SMALL-MEDIUM
ENVIRONMENTS





And if the space is bigger...

AIR CONDITIONER
SIZE 50
CAN BE COUPLED
WITH OUTDOOR UNIT
MUZ-AY50VG
SUITABLE FOR MEDIUM-LARGE
ENVIRONMENTS










| m² room | Kw of power |
|---------------|-------------|
| from 10 to 15 | 2,0 |
| from 15 to 25 | 2,5 |
| from 25 to 40 | 3,5 |
| from 40 to 50 | 4,2 |



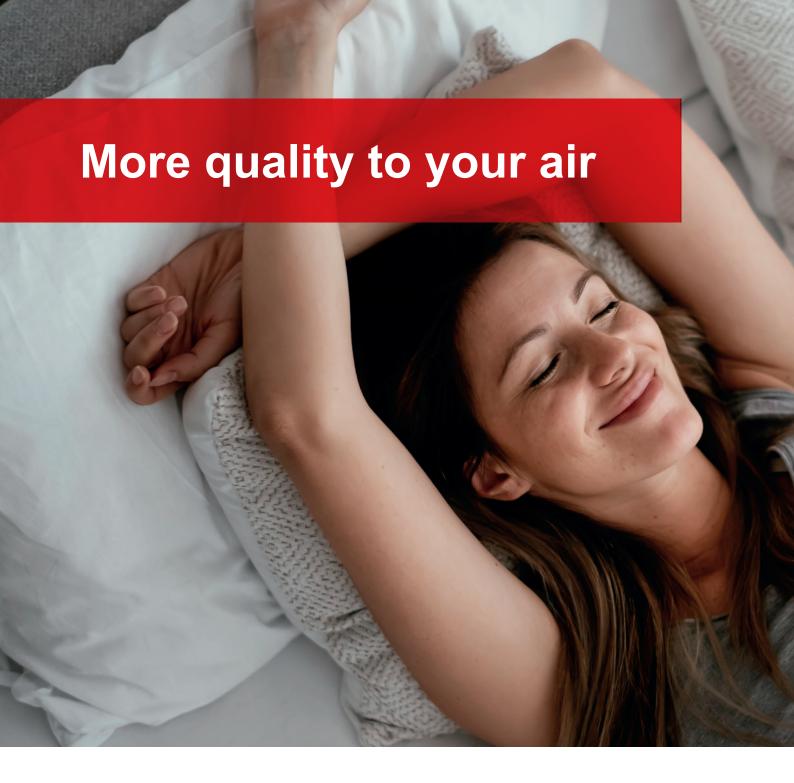

Plasma Quad Plus PLASMA QUAD PLUS air purification system

Although we may not see them, atmospheric contaminants of various sizes are ever-present in our homes: **pollen, mould, viruses and bacteria, mites and dust.** Over time, the presence of these contaminants can cause health problems, especially for allergy sufferers.





What is air quality?

Air quality is the measure of how free the air is from polluting elements.

It is, therefore, the measure of how healthy the air we breathe is. The air has direct influences on the individuals within our everyday living environments (home, office, restaurants and shops, factories, etc.).

Knowing which contaminants are present* and controlling their quantities helps to reduce or even completely eliminate the risks of health problems, and ensures greater comfort for everyone.

Mitsubishi Electric has always paid attention to the quality of the air we breathe.



| YESTERDAY | | | Bacteria | Virus | Mould | Allergens | Dust | PM 2,5 |
|-----------|-----|------------------------------|----------|-------|-------|-----------|------|--------|
| | | Plasma Duo Filter Systems | | | | A+ | A+ | |
| | | Plasma Quad | A+++ | A+++ | A++ | A++ | A+ | |
| | | Plasma Quad Plus | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ |
| TOD | DAY | | | | | | | |


Mitsubishi Electric air conditioning systems with Plasma Quad PLUS filtration are designed to improve the quality of the air we breathe at home.

The Plasma Quad Plus technology exploits an electric field and a series of electric discharges onto the passing air, resulting in elimination of bacteria and viruses before the air is introduced to the room.

^{*} Source: Ministry of Health



improves air quality

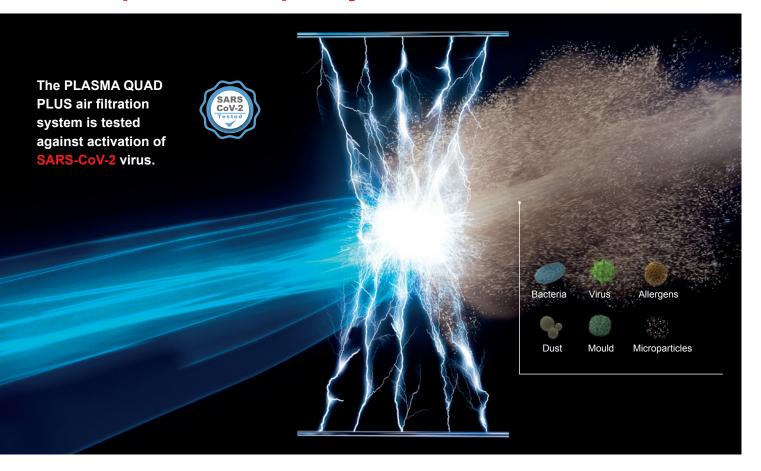



99%

OF VIRUSES, BACTERIA AND MOULDS PRESENT IN THE AIR

99,7%


OF MITES AND DUST

98%

OF ALLERGENS (E.G. POLLEN)

99%

OF AIRBORNE PM2.5

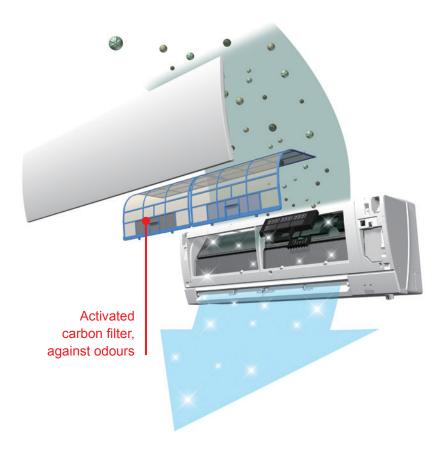



Air quality: FUNCTION SELF CLEAN

The new Self Clean function dries the indoor unit at the end of the cooling cycle, preventing development of mould and bad smells.





WITH SELF CLEAN MODE

After switching off from cooling or dehumidification mode, the air conditioner activates a microventilation system, completely drying every water particle and keeping the evaporator clean.





Reduced consumption, greater savings

Dual Barrier Coating

Dual Barrier Coating is a special double layer protective coating that **prevents deposition of dust and impurities** on the internal components of the air conditioner, even over long periods of time. This technology helps maintain the power needed for full-capacity operation. Preventing the formation of dirt on the internal components also means **avoiding development of bad smells**, and less frequent cleaning for the air conditioner.



deposition of dust and impurities on the internal components even after long periods of time


PROMOTES

reduced consumption, and reduces the need for maintenance, for greater general savings

more advantages
greater efficiency of the air
conditioner over time, reduction
of energy waste





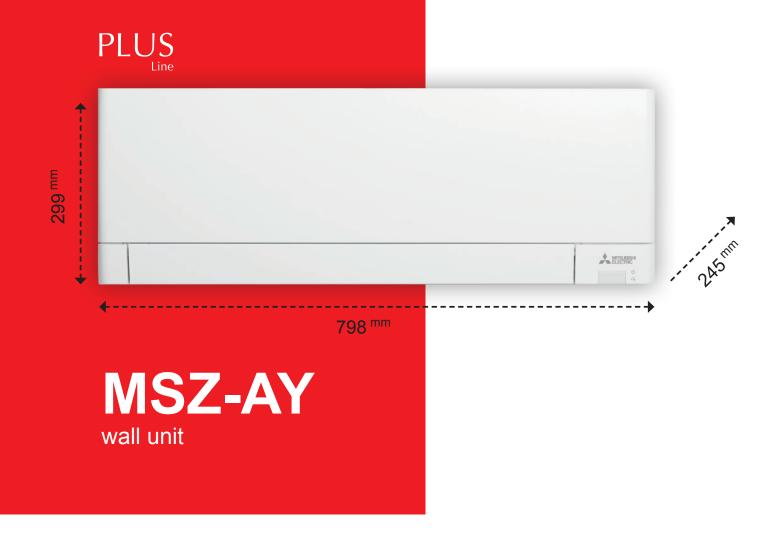

Technological features

MITSUBISHI'S ELECTRIC INNOVATION LEADS TO NEW FUNCTIONS AND TECHNOLOGIES, AT THE SERVICE OF COMFORT AND ENERGY EFFICIENCY.

The new MSZ-AY model sets new standards in the world of residential air conditioning.

With renewed aesthetics, quality materials in 'velvety' finish, and careful attention to comfort with its mere 18 dB(A) sound level, and the addition of the 'Plasma Quad Plus' active filtration device, MSZ-AY packages Mitsubishi Electric's best technology in ultra-compact dimensions.





High seasonal energy efficiency in **heating** and **cooling**.





Also available in the MULTISPLIT version, with the possibility of connection.





The MSZ-AY line of air conditioners guarantees maximum acoustic comfort inside the room.





New satin finish for an elegant and compact design suited to any type of room.

Greater savings on bills



Greater energy efficiency yields savings in electrical bills.

Air purification



The Plasma Quad Plus air purification system suppresses viruses, bacteria, moulds, allergens and pollen. Also effective against SARS-CoV-2.

Casting quality



Dual Barrier Coating technology: prevents deposition of dust and impurities.

Air distribution



The **horizontal** and **vertical deflectors** direct airflow to all corners of the room.

OC Inverter technology



Inverter technology ensures superior performance and optimized control of the operating frequency.

Self diagnosis



A self-diagnosis system facilitates resetting operations.

Weekly timer



Set the **desired temperature** and ON/OFF
operations in a weekly plan, **according to** occupant **habits.**

"I save" function



Select your preferred setting, such as night mode, using a single button.

Cooling at low temperatures



Cooling is ensured even at low outdoor temperatures, thanks to an intelligent control of the outside fan.

Backlit remote-control display



The remote-control display is backlit, for easy viewing even at night.

Wight Mode




LED brightness reduction, deactivation of "beep" sounds, reduction of outdoor unit sound by 3 dB.

Auto restart



In the event of a power failure, the air conditioner **restarts automatically** when powered is restored.

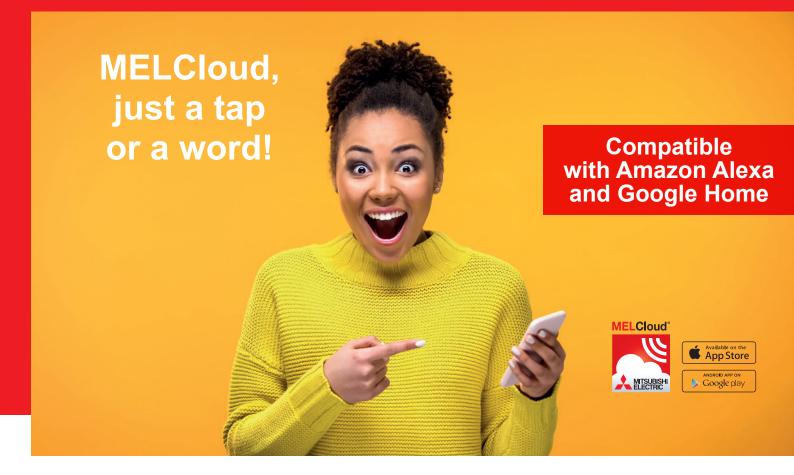

MELCloud, your air conditioner anywhere

Maximum compatibility with PC, Tablet and Smartphone

MELCloud is the Mitsubishi Electric remote control that allows you to manage your system wherever you are via PC, tablet or smartphone; all you need is an internet connection.

Main functions

MELCloud allows you to:

- · Manage On/Off functions
- Select mode (Auto/Heat/Cool/Fan)
- Select fan speed
- Programme a weekly timer
- · Generate reports
- · Adjust the angle of vents
- Detect and set room temperature
- Receive weather information for the installation location

MELCloud, a secure system

MELCloud is a secure system

Once you've registered and configured the air conditioner, the App allows you to operate the system remotely. The unit is associated with your personal account, allowing you to control the air conditioner, monitor its consumption, and programme it to turn on at any time.



MELCloud a system integrated into the unit

The new MSZ-AY offers the user experience of MelCloud integrated into the air conditioner, allowing the user to remotely manage the main functions and monitor operation and energy consumption, all using the Wi-Fi controller.

WWW.MELCLOUD.COM





Technical Information



MSZ-AY 25-35-42-50











Dual Barrier Coating

Technical specifications DC INVERTER / HEAT PUMP **MODEL** SET MSZ-AY25VGKP MSZ-AY35VGKP MSZ-AY42VGKP MSZ-AY50VGKP MSZ-AY25VGKP MSZ-AY35VGKP MSZ-AY42VGKP MSZ-AY50VGKP Indoor unit MUZ-AY35VG MUZ-AY50VG Outdoor unit MUZ-AY25VG MUZ-AY42VG Voltage/Freq./Phases V/Hz/no 230 / 50 / 1 230 / 50 / 1 230 / 50 / 1 230 / 50 / 1 Power supply Outdoor unit Power supply side PdesignC kW 2.5 5.0 SEER 8,7 8,7 7,9 7,5 Cooling Energy efficiency class A+++ A+++ A++ A++ Annual electricity consumption kWh/a 100 141 186 232 Pdesignh 2,4 2,9 3,8 4,2 Ecodesign performance EN14825 SCOP 4,8 4,7 4,7 4,7 Energy efficiency class A++ A++ A++ A++ kWh/a 697 863 1131 1248 Annual electricity consumption SCOP 5,7 5,9 5.9 6.1 Hot season heating Energy efficiency class A+++ A+++ A+++ A+++ Rated capacity (min/max) k\// 2,5 (0,9 - 3,4) 3,5 (1,1 - 3,8) 4,2 (0,9 - 4,5) 5,0 (1,4 - 5,4) 0,6 0,99 1,54 Cooling Rated absorbed power 4,17 3,54 3,23 3,24 EN14511 performance Rated capacity (min/max) kW 3,2 (1,0 - 4,1) 4,0 (1,3 - 4,6) 5,2 (1,3 - 6,0) 5,5 (1,4 - 7,3) Heating Rated absorbed power 0.78 kW 1.03 1.39 1.47 COP 4.1 3.88 3.74 3.74 Sizes HxWxD mm 299 x 798 x 245 Weight 11 11 11 11 Cooling m³/mir 3,6-5,0-6,3-7,8-10,5 3,6-5,0-6,3-7,8-11,1 4,5-5,7-7,0-8,4-10,5 5,2-6,4-7,5-9,1-11,7 Air flow Indoor unit Heating m³/min 4,0-5,0-6,6-8,0-11,8 4,0-5,0-6,6-8,0-11,8 4,4-5,4-7,0-8,6-12,9 4,8-5,7-7,3-9,1-12,9 28-33-36-40-44 18-24-30-36-42 Sound pressure Cooling dB(A) 18-24-30-36-42 21-29-34-38-42 (SLo-Lo-Mid-Hi-SHi) Heating 18-24-34-39-45 18-24-31-38-45 21-29-35-40-45 28-33-38-43-48 dB(A) Sound power Rated dB(A) 58 57 57 57 550 x 800 x 285 Sizes HxWxD mm 550 x 800 x 285 550 x 800 x 285 714 x 800 x 285 Weight kg 27 28.5 34 40.5 Outdoor unit Sound pressure dB(A) 47 / 48 49 / 50 50 / 51 52 / 52 Rated 59 61 61 64 Sound power dB(A) Max. absorbed current 7,3 7,3 9,6 13,5 Liquid/Gas 6,35 / 9,52 6,35 / 9,52 6,35 / 9,52 6,35 / 9,52 Diameters mm Refrigerated lines Max. length 20 20 20 20 m Max. height difference m 12 12 12 12 -10 ~ +46 -10 ~ +46 -10 ~ +46 Cooling °C -10 ~ +46 Guaranteed function range -20 ~ +24 Heating -20 ~ +24 °C -20 ~ +24 -20 ~ +24 Type / Precharge kg R32 / 0,55 R32 / 0,55 R32 / 0,70 R32 / 1,00 Refrigerant GWP / Tons. Co₂ Eq. 675 / 0,37 675 / 0.37 675 / 0,47 675 / 0,68



Mitsubishi Electric Europe B.V. Italian Branch

Via Energy Park, 14 20871 Vimercate (MB) Phone: +39 039 60531 Fax: +39 039 6057694 e-mail: clima@it.mee.com

The equipment described in this catalogue contain fluorinated HFC gasses with a GWP >1.

Installation of those equipment must be executed by professional installer based on EU reg. 303/2008 and 517/2014

LEAFLET MSZ-AY E-2305280 (18000)

Mitsubishi Electric reserves the right to change the data in this publication at any time and without notice.

Any reproduction, even if partial, is prohibited.



