

SERIES SELECTION

Power Inverter Series

Indoor Unit

PLA-ZM35/50/60/71/100/125/140EA2

Panel

| Panel | With Signal Receiver | With 3D i-see Sensor | With Wireless Remote Controller | With Auto Elevation |
|-------------|----------------------|----------------------|---------------------------------|---------------------|
| PLP-6EA | | | | |
| PLP-6EAL | ✓ | | | |
| PLP-6EAE | | ✓ | | |
| PLP-6EALAE | ✓ | ✓ | | |
| PLP-6EAJ | ✓ | | | ✓ |
| PLP-6EALAEJ | ✓ | ✓ | | ✓ |
| PLP-6EALM2 | ✓ | | ✓ | |
| PLP-6EALME2 | ✓ | ✓ | ✓ | |

Outdoor Unit

R410A

For Single

PUHZ-ZRP35/50 PUHZ-ZRP60/71 PUHZ-ZRP100/125/140

R410A

For Multi (Twin/Triple/Quadruple)

PUHZ-ZRP71 PUHZ-ZRP100/125/140/200/250

Remote Controller

Optional
 Optional
 Optional
 * Enclosed in PLP-6EALM2/PLP-6EALME2

PLA-ZM EA2 Indoor Unit Combinations

Indoor unit combinations shown below are possible.

| Indoor Unit Combination | Outdoor Unit Capacity | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------|-----------------------|------|------|------|-------|-------|-------|-----|----------|-------------|------|------|------|-------------|-------|------|------------|-------------|------|------|---------------|--------------|--|--|--|
| | For Single | | | | | | | | For Twin | | | | | | | | For Triple | | | | For Quadruple | | | | |
| | 35 | 50 | 60 | 71 | 100 | 125 | 140 | 200 | 250 | 71 | 100 | 125 | 140 | 200 | 250 | 140 | 200 | 250 | 200 | 250 | 200 | 250 | | | |
| Power Inverter (PUHZ-ZRP) | 35x1 | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | - | - | 35x2 | 50x2 | 60x2 | 71x2 | 100x2 | 125x2 | 50x3 | 60x3 | 71x3 | 50x4 | 60x4 | | | | | |
| Distribution Pipe | - | - | - | - | - | - | - | - | - | MSDD-50TR-E | | | | MSDD-50WR-E | | | | MSDT-111R-E | | | | MSDF-1111R-E | | | |

SERIES SELECTION

Standard Inverter Series

Indoor Unit

PLA-M35/50/60/71/100/125/140EA2

Panel

| Panel | With Signal Receiver | With 3D i-see Sensor | With Wireless Remote Controller | With Auto Elevation |
|-------------|----------------------|----------------------|---------------------------------|---------------------|
| PLP-6EA | | | | |
| PLP-6EAL | ✓ | | | |
| PLP-6EAE | | ✓ | | |
| PLP-6EALAE | ✓ | ✓ | | |
| PLP-6EAJ | ✓ | | | ✓ |
| PLP-6EALAEJ | ✓ | ✓ | | ✓ |
| PLP-6EALM2 | ✓ | | ✓ | |
| PLP-6EALME2 | ✓ | ✓ | ✓ | |

Outdoor Unit

R410A

For Single

SUZ-KA35 SUZ-KA50/60/71 PUHZ-P100/125/140

R410A

For Multi (Twin/Triple/Quadruple)

PUHZ-P100/125/140 PUHZ-P200/250

Remote Controller

Optional
 Optional
 Optional
 * Enclosed in PLP-6EALM2/PLP-6EALME2

PLA-M EA2 Indoor Unit Combinations

Indoor unit combinations shown below are possible.

| Indoor Unit Combination | Outdoor Unit Capacity | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|-----------------------|------|------|------|-------|-------|-------|-----|----------|-------------|------|------|-------|-------------|------|------|------------|-------------|------|-----|---------------|--------------|--|--|--|
| | For Single | | | | | | | | For Twin | | | | | | | | For Triple | | | | For Quadruple | | | | |
| | 35 | 50 | 60 | 71 | 100 | 125 | 140 | 200 | 250 | 71 | 100 | 125 | 140 | 200 | 250 | 140 | 200 | 250 | 200 | 250 | 200 | 250 | | | |
| Standard Inverter (SUZ & PUHZ-P) | 35x1 | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | - | - | 50x2 | 60x2 | 71x2 | 100x2 | 125x2 | 50x3 | 60x3 | 71x3 | 50x4 | 60x4 | | | | | | |
| Distribution Pipe | - | - | - | - | - | - | - | - | - | MSDD-50TR-E | | | | MSDD-50WR-E | | | | MSDT-111R-E | | | | MSDF-1111R-E | | | |

PLA-ZM SERIES

POWER INVERTER

| Type | | Inverter Heat Pump | | | | | | | | | | | | | | | | | | | |
|----------------------------|-------------|---|---------------|---------------|---------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|----------|--|----------|--|----------|--|
| Indoor Unit | | PLA-M35EA2 | PLA-M50EA2 | PLA-M60EA2 | PLA-M71EA2 | PLA-M100EA2 | PLA-M125EA2 | PLA-M140EA2 | PLA-M150EA2 | PLA-M175EA2 | PLA-M200EA2 | PLA-M250EA2 | PLA-M300EA2 | PLA-M350EA2 | | | | | | | |
| Outdoor Unit | | PUHZ-ZRP35KA2 | PUHZ-ZRP50KA2 | PUHZ-ZRP60KA2 | PUHZ-ZRP71KA2 | PUHZ-ZRP100KA2 | PUHZ-ZRP125KA2 | PUHZ-ZRP140KA2 | PUHZ-ZRP150KA2 | PUHZ-ZRP175KA2 | PUHZ-ZRP200KA2 | PUHZ-ZRP250KA2 | PUHZ-ZRP300KA2 | PUHZ-ZRP350KA2 | | | | | | | |
| Refrigerant ⁽¹⁾ | | R410A | | | | | | | | | | | | | | | | | | | |
| Power Supply | | Outdoor power supply VKA-VHA-230/Single/50, YKA-400/Three/50 | | | | | | | | | | | | | | | | | | | |
| Cooling | Capacity | Rated | | kW | | 3.6 | | 5.0 | | 6.1 | | 7.1 | | 9.5 | | 12.5 | | 13.4 | | 13.4 | |
| | | Min-Max | | kW | | 1.6-4.5 | | 2.3-5.6 | | 2.7-6.5 | | 3.3-8.1 | | 4.9-11.4 | | 5.5-14.0 | | 5.5-14.0 | | 6.2-15.0 | |
| | Total Input | Rated | | kW | | 0.782 | | 1.330 | | 1.660 | | 1.790 | | 2.200 | | 2.200 | | 3.846 | | 3.846 | |
| | EER | Rated | | kW/kWh | | 4.60 | | 3.75 | | 3.66 | | 3.95 | | 4.32 | | 4.32 | | 3.25 | | 3.07 | |
| | Design load | kW | | 3.6 | | 5.0 | | 6.1 | | 7.1 | | 9.5 | | 12.5 | | 13.4 | | 13.4 | | | |
| Heating | Capacity | Rated | | kW | | 4.1 | | 6.0 | | 7.0 | | 8.0 | | 11.2 | | 14.0 | | 14.0 | | 16.0 | |
| | | Min-Max | | kW | | 1.6-5.2 | | 2.5-7.3 | | 2.8-8.2 | | 3.5-10.2 | | 4.5-14.0 | | 5.0-16.0 | | 5.0-16.0 | | 5.7-18.0 | |
| | Total Input | Rated | | kW | | 0.850 | | 1.550 | | 1.900 | | 2.600 | | 2.600 | | 3.674 | | 3.674 | | 4.848 | |
| | COP | Rated | | kW/kWh | | 4.82 | | 3.85 | | 3.70 | | 4.20 | | 4.31 | | 4.31 | | 3.81 | | 3.30 | |
| | Design load | kW | | 2.5 | | 3.8 | | 4.4 | | 4.7 | | 7.8 | | 7.8 | | - | | - | | - | |

¹ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

² Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

³ Optional air protection guide is required where ambient temperature is lower than -5°C. ⁴ SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

⁵ Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PLA-M SERIES

STANDARD INVERTER

| Type | | Inverter Heat Pump | | | | | | | | | | | | | | | | | | | |
|----------------------------|-------------|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--|----------|--|----------|--|----------|--|
| Indoor Unit | | PLA-M35EA2 | PLA-M50EA2 | PLA-M60EA2 | PLA-M71EA2 | PLA-M100EA2 | PLA-M125EA2 | PLA-M140EA2 | PLA-M150EA2 | PLA-M175EA2 | PLA-M200EA2 | PLA-M250EA2 | PLA-M300EA2 | PLA-M350EA2 | | | | | | | |
| Outdoor Unit | | SUZ-KA35VA6 | SUZ-KA50VA6 | SUZ-KA60VA6 | SUZ-KA71VA6 | PUHZ-P100KA | PUHZ-P125KA | PUHZ-P140KA | PUHZ-P150KA | PUHZ-P175KA | PUHZ-P200KA | PUHZ-P250KA | PUHZ-P300KA | PUHZ-P350KA | | | | | | | |
| Refrigerant ⁽¹⁾ | | R410A | | | | | | | | | | | | | | | | | | | |
| Power Supply | | Outdoor power supply VA-VKA-230/Single/50, YKA-400/Three/50 | | | | | | | | | | | | | | | | | | | |
| Cooling | Capacity | Rated | | kW | | 3.6 | | 5.5 | | 5.7 | | 7.1 | | 9.4 | | 12.1 | | 13.6 | | 13.6 | |
| | | Min-Max | | kW | | 1.4-3.9 | | 2.3-5.6 | | 2.3-6.3 | | 2.8-8.1 | | 3.7-10.6 | | 3.7-10.6 | | 5.6-13.0 | | 5.6-13.0 | |
| | Total Input | Rated | | kW | | 1.020 | | 1.610 | | 1.760 | | 2.100 | | 3.186 | | 3.186 | | 4.101 | | 5.418 | |
| | EER | Rated | | kW/kWh | | 3.53 | | 3.42 | | 3.24 | | 3.38 | | 2.95 | | 2.95 | | 2.95 | | 2.51 | |
| | Design load | kW | | 3.6 | | 5.5 | | 5.7 | | 7.1 | | 9.4 | | 12.1 | | 13.6 | | 13.6 | | | |
| Heating | Capacity | Rated | | kW | | 4.1 | | 5.8 | | 6.9 | | 8.0 | | 11.2 | | 13.5 | | 13.5 | | 15.0 | |
| | | Min-Max | | kW | | 1.7-5.0 | | 1.7-7.2 | | 2.5-8.0 | | 2.6-10.2 | | 2.8-12.5 | | 2.8-12.5 | | 4.8-15.0 | | 4.8-15.0 | |
| | Total Input | Rated | | kW | | 1.000 | | 1.690 | | 1.970 | | 2.247 | | 3.265 | | 3.265 | | 3.846 | | 4.672 | |
| | COP | Rated | | kW/kWh | | 4.10 | | 3.43 | | 3.50 | | 3.56 | | 3.43 | | 3.43 | | 3.51 | | 3.21 | |
| | Design load | kW | | 2.6 | | 4.3 | | 4.6 | | 5.8 | | 8.0 | | 8.0 | | - | | - | | - | |

¹ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

² Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

³ Optional air protection guide is required where ambient temperature is lower than -5°C. ⁴ SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

⁵ Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PLA-M SERIES
POWER INVERTER



| Type | | Inverter Heat Pump | | | | | | | | | | | |
|---------------------------|-------------|---|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Indoor Unit | | PLA-M35EA2 | PLA-M50EA2 | PLA-M60EA2 | PLA-M71EA2 | PLA-M100EA2 | PLA-M100EA2 | PLA-M125EA2 | PLA-M125EA2 | PLA-M140EA2 | PLA-M140EA2 | PLA-M140EA2 | PLA-M140EA2 |
| Outdoor Unit | | PUHZ-ZRP35VKA2 | PUHZ-ZRP50VKA2 | PUHZ-ZRP60VHA2 | PUHZ-ZRP71VHA2 | PUHZ-ZRP100VKA3 | PUHZ-ZRP100VKA3 | PUHZ-ZRP125VKA3 | PUHZ-ZRP125VKA3 | PUHZ-ZRP140VKA3 | PUHZ-ZRP140VKA3 | PUHZ-ZRP140VKA3 | PUHZ-ZRP140VKA3 |
| Refrigerant ¹⁾ | | R410A | | | | | | | | | | | |
| Power Supply | | Outdoor power supply | | | | | | | | | | | |
| Outdoor(V/Phase/Hz) | | VKA-VHA:230/Single/50, YKA:400/Three/50 | | | | | | | | | | | |
| Cooling | Capacity | Rated | kW | 3.6 | 5.0 | 6.1 | 7.1 | 9.5 | 9.5 | 12.5 | 12.5 | 13.4 | 13.4 |
| | Min-Max | kW | 1.6 - 4.5 | 2.3 - 5.6 | 2.7 - 6.5 | 3.3 - 8.1 | 4.9 - 11.4 | 4.9 - 11.4 | 5.5 - 14.0 | 5.5 - 14.0 | 6.2 - 15.0 | 6.2 - 15.0 | 6.2 - 15.0 |
| | Total Input | Rated | kW | 0.833 | 1.416 | 1.747 | 1.868 | 2.230 | 2.230 | 3.869 | 3.869 | 4.393 | 4.393 |
| | EER | | | 4.32 | 3.53 | 3.49 | 3.80 | 4.26 | 4.26 | 3.23 | 3.23 | 3.05 | 3.05 |
| | Design load | kW | 3.6 | 5.0 | 6.1 | 7.1 | 9.5 | 9.5 | 12.5 | 12.5 | 13.4 | 13.4 | 13.4 |
| Heating (Average Season) | Capacity | Rated | kW | 4.1 | 6.0 | 7.0 | 8.0 | 11.2 | 11.2 | 14.0 | 14.0 | 16.0 | 16.0 |
| | Min-Max | kW | 1.6 - 5.8 | 2.5 - 7.3 | 2.8 - 8.2 | 3.5 - 10.2 | 4.5 - 14.0 | 4.5 - 14.0 | 5.0 - 16.0 | 5.0 - 16.0 | 5.7 - 18.0 | 5.7 - 18.0 | 5.7 - 18.0 |
| | Total Input | Rated | kW | 0.920 | 1.810 | 2.070 | 2.110 | 2.690 | 2.690 | 3.773 | 3.773 | 4.907 | 4.907 |
| | COP | | | 4.46 | 3.31 | 3.38 | 3.79 | 4.16 | 4.16 | 3.71 | 3.71 | 3.26 | 3.26 |
| | Design load | kW | 4.1 | 6.0 | 7.0 | 8.0 | 11.2 | 11.2 | 14.0 | 14.0 | 16.0 | 16.0 | 16.0 |

PEAD SERIES

R32
R410A

PEAD-M35/50/60/71/100/125/140JA2


Energy efficiency has been improved. A reduced electricity consumption contributes to a further reduction in operating cost. The thin body with a wide-ranged external static pressure of this series is the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space.



ErP Lot-10 compliant, Achieving High Energy Efficiency



The shape of fan wing and casing is improved to provide more smooth air flow, increasing the operation efficiency. All models under 12kW(M35-M100) are complied with ErP Lot 10 and energy rankings of A++ for cooling and A+ for heating. This contributes to a reduction in the cost of annual electricity.

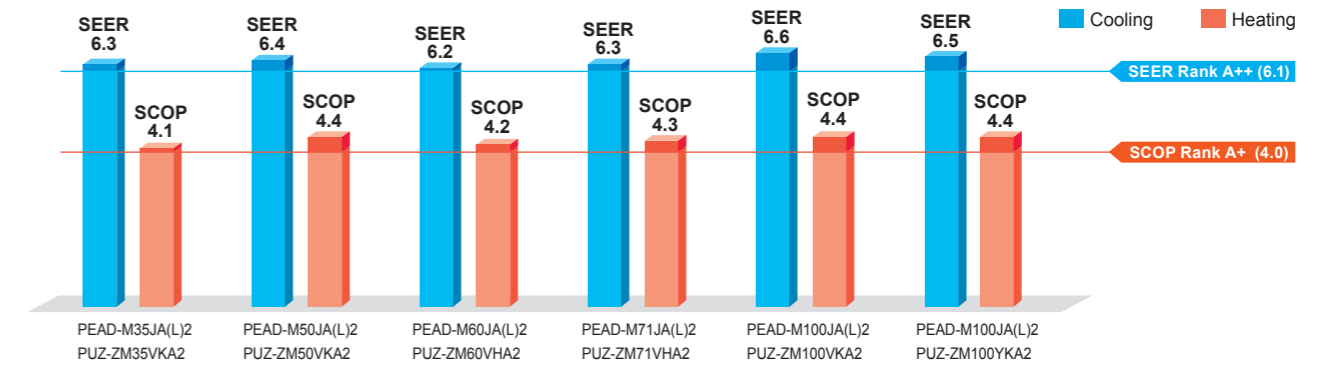

¹⁾ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
²⁾ Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
³⁾ Optional air protection guide is required where ambient temperature is lower than -5°C.
⁴⁾ SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
⁵⁾ Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

Compact Indoor Units

The height of the models from 35-140 has been unified to 250 mm, which makes installation in low ceiling with minimal clearance space possible.


Selectable Static Pressure Levels

External static pressure conversion can be set up to five levels. Capable of being set to a maximum of 150 Pa, units are applicable to a wide range of building types.

Drain Pump is Optionally Selectable

The line-up consists of two types: models with or without a built-in drain pump, thus allowing more freedom in piping design.

- PEAD-M JA2 ▶ Built-in drain pump
- PEAD-M JAL2 ▶ No drain pump

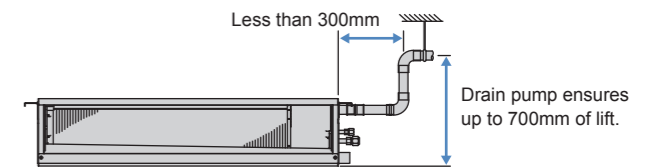

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment or PQ box is required.